


MAGNETIC CREDIT CARD READER

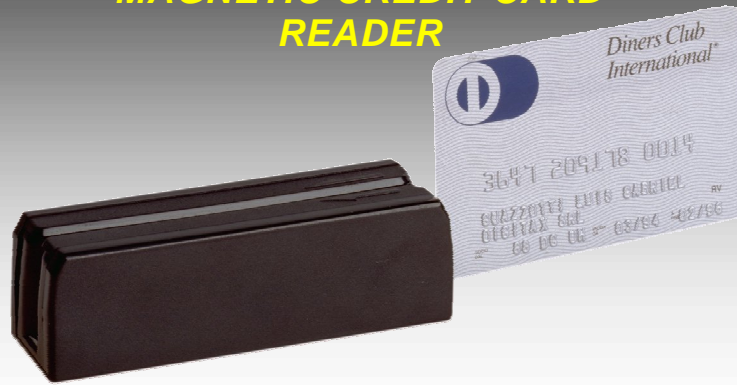

MAIN FEATURES

<input checked="" type="checkbox"/> <i>Standard Card:</i>	ISO2
<input checked="" type="checkbox"/> <i>Track used:</i>	Track 2nd
<input checked="" type="checkbox"/> <i>Recording method:</i>	FM
<input checked="" type="checkbox"/> <i>Recording density:</i>	75 BPI

LIFE AND ERROR RATE

<input checked="" type="checkbox"/> <i>Life long of head:</i>	Approx. 300,000 time pass
<input checked="" type="checkbox"/> <i>Reading error:</i>	Less than 0.5 %

WORKING CONDITIONS

<input checked="" type="checkbox"/> <i>Temperature range (operation) :</i>	-20 ° C to + 70 ° C
<input checked="" type="checkbox"/> <i>Temperature range (conservation) :</i>	- 30 ° C to + 80 ° C
<input checked="" type="checkbox"/> <i>Humidity range (operation) :</i>	10% to 95% without condensation
<input checked="" type="checkbox"/> <i>Humidity range (conservation) :</i>	Up to 95% without condensation
<input checked="" type="checkbox"/> <i>Vibration (operation) :</i>	Vibration sweep 10 / 50 Hz/mm, X, Y, Z direction
<input checked="" type="checkbox"/> <i>Shock durability :</i>	30 G